

Town of Baltimore
Baltimore, Vermont 05143

APPLICATION FOR ACCESS PERMIT

Applicant: _____ Phone #: _____
Mailing Address: _____

Property Owner: _____
(if different from above) _____

Property Lot # _____ Town Highway Name: _____ (T.H.#: _____)

Description of access request: _____

What is the size of the culvert under the driveway in the ditch-line? _____

What is the sight distance (in feet) in each direction? _____/_____

What is the angle of intersection with the town road? _____

What is the distance to the nearest intersection? _____

The applicant and/or property owner agrees to maintain the access and adhere to the directions, restrictions and conditions of the permit, as well as the ordinances and regulations of the Town.

_____/_____
Signature of applicant/property owner (if different) _____ Date _____







Date of inspection by Commissioner: _____ Approver/Disapproved (*circle one*)

Special directions, restrictions or conditions: _____

Notice: This permit, if issued, is in accordance with Title 19, Section 1111, VSA, relative to all highways within the control and jurisdiction of the Town of Baltimore. The issuance of this permit does not release the applicant from any requirements of statutes or ordinances ruled by other local, regional or state agencies. Violations to the permit are subject to the penalties set forth in Title 19, VSA, Section 1111. Any damage caused to the town highway resulting from an activity authorized by the issuance of this permit is the responsibility of the applicant to repair as set forth in Title 19, VSA, Section 1108. Repairs must meet the minimum standards defined by the Road Commissioner.

Road Commissioner _____ Date _____

Standards for Residential And Commercial Drives (Standard B-71)

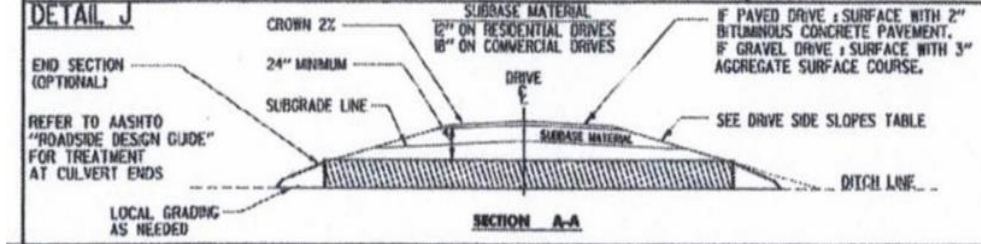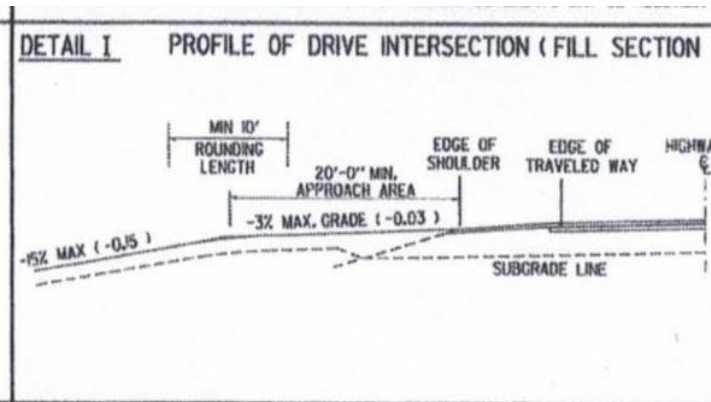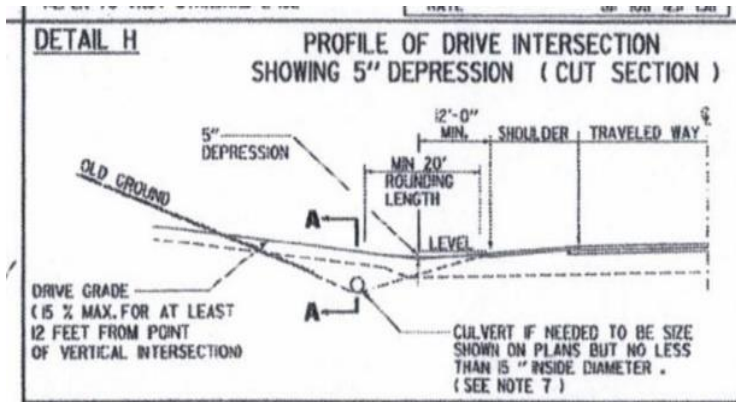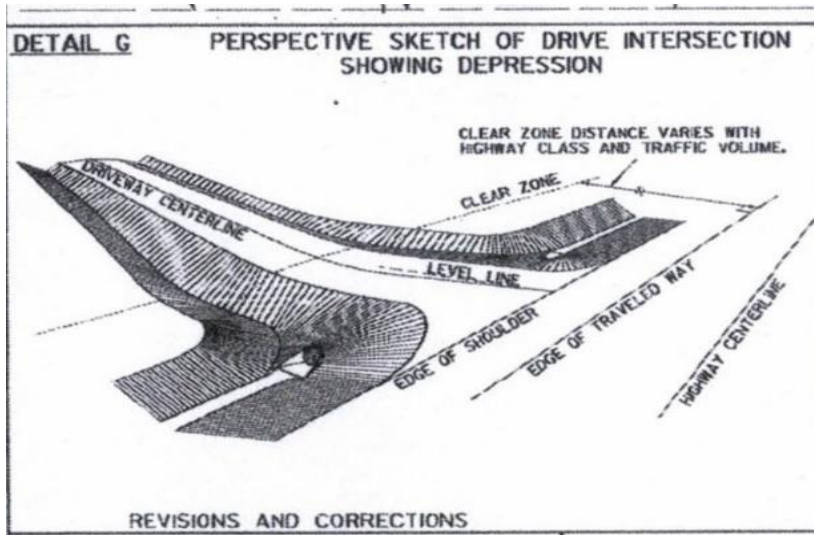

DRIVE SIDE SLOPES	
LOCATION OF SLOPE	SLOPE RATE
V > 40 MPH	1/6 OR FLATTER
URBAN AREAS, OR V < 40 MPH	1/4 DESIRABLE 1/2 ALLOWABLE
OUTSIDE CLEAR ZONE	1/2 OR FLATTER

Note 7

Circular drainage culverts under drives shall have a minimum inside diameter (I.D.) of 15". Pipe arches used under drives shall have a minimum inside cross-sectional area equivalent to that provided by a 15" circular pipe.