

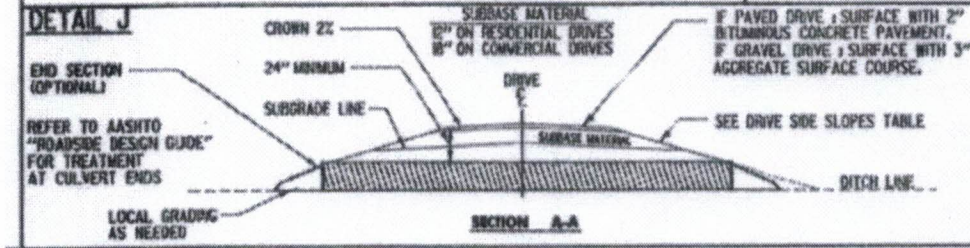
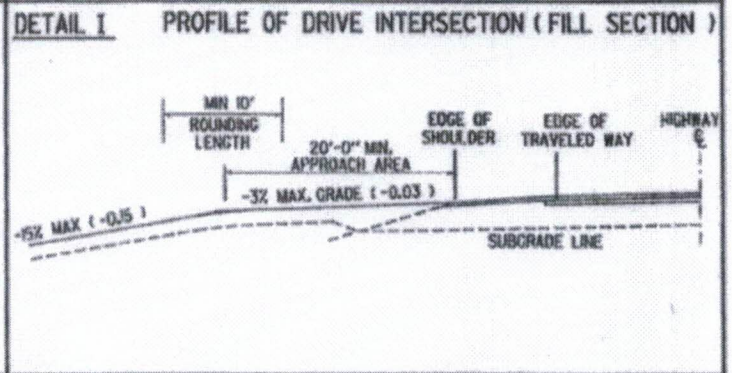


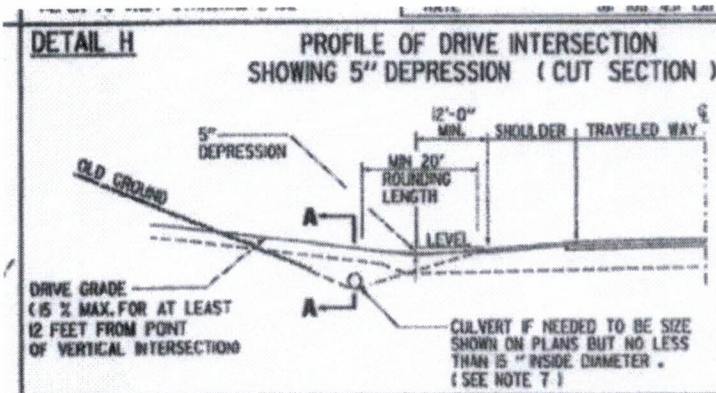

# Standards for Residential And Commercial Drives (Standard B-71)

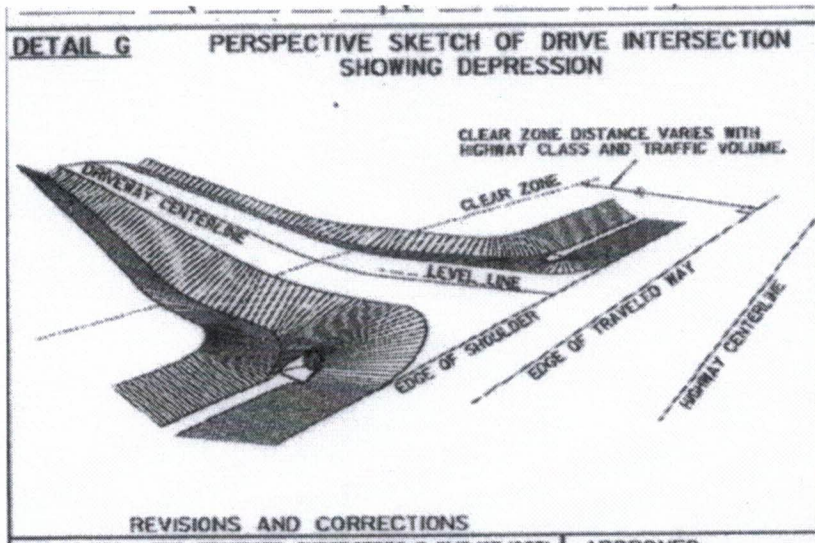

**DRIVE SIDE SLOPES**

LOCATION OF SLOPE	SLOPE RATE
V > 40 MPH	1/6 OR FLATTER
URBAN AREAS, OR V ≤ 40 MPH	1/4 DESIRABLE 1/2 ALLOWABLE
OUTSIDE CLEAR ZONE	1/2 OR FLATTER

**Note 7**

Circular drainage culverts under drives shall have a minimum inside diameter (I.D.) of 15". Pipe arches used under drives shall have a minimum inside cross-sectional area equivalent to that provided by a 15" circular pipe.